



# Mounting instructions

# StarFish Mini # 156

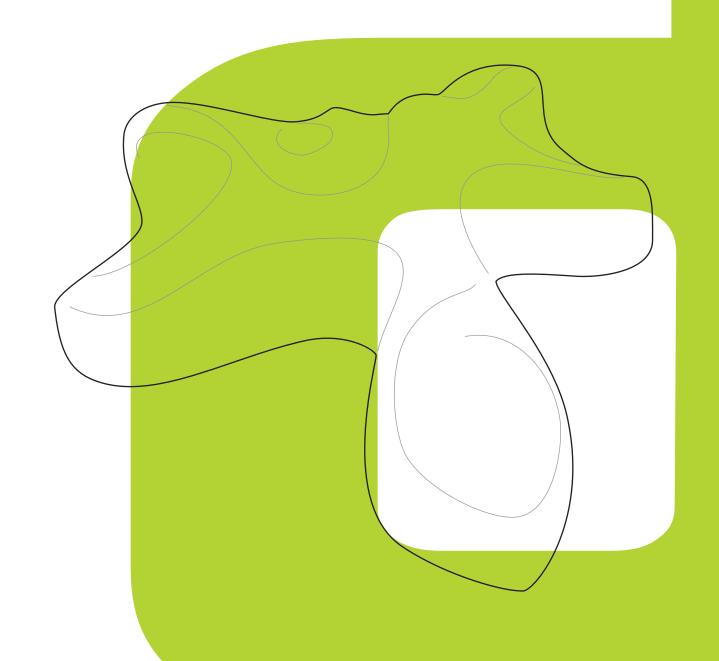


## Fixing onto cast foundation

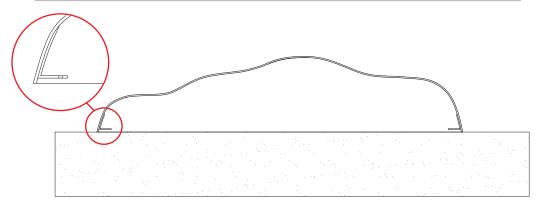

1) StarFish Mini comes with 4 fixed internal angles (stainless steel) with Ø14mm holes. Tape markings on the outside of the StarFish Mini indicate the locations of the angles.


The tape markings also indicates where to dig holes for the ground foundation.

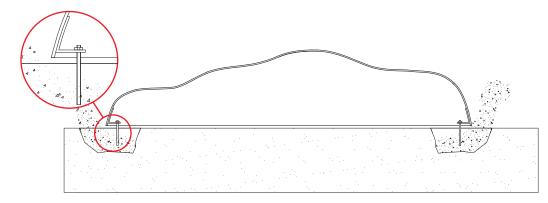

3) A number of threaded rods (corresponding the number of dug holes) is mounted in the internal angles and the StarFish Mini is placed over the holes. The holes are filled with concrete (strength 12).




2) Depending on the actual ground conditions dig 5-10 holes for fixating the Starfish Mini.

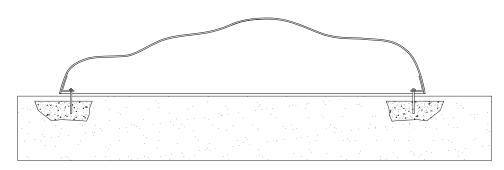

4) The StarFish Mini is fixed and ready for use.




#### Surface fixation

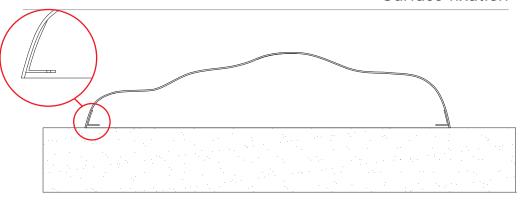


1) StarFish Mini comes with 4 fixed stainless steel angles with Ø14mm holes. Tape markings on the outside of the StarFish Mini indicate the locations of the angles.


#### Surface fixation

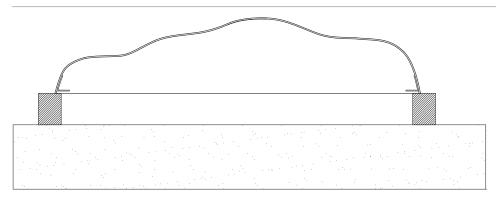

2) The StarFish Mini is elevated approx. 25 cm.

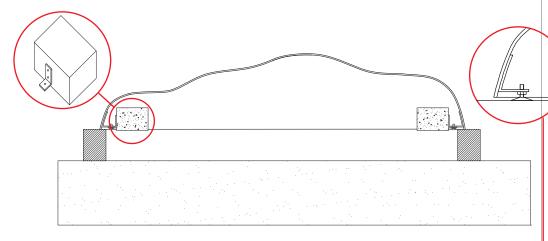

3) Prefabricated concrete blocks are mounted on the 4 internal angles with bolts and nuts. The concrete blocks are wedged up while they are mounted.

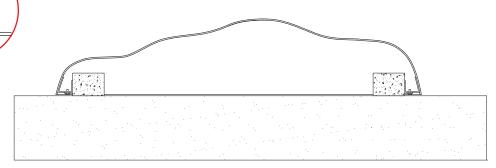

4) The elevation and the wedges for the concrete blocks are removed. The Starfish Mini is fixed and ready for use.



### Cleaning instructions

The StarFish Mini is molded in 12mm durable and maintenance-free surface with a tinted glossy gelcoat surface.

UV-resistant (minimal fading by the sun), robust and wind and weather resistant.

Wash with soap and water as needed.

In order to restore the lustrous/shiny surface the fiberglass can be polished.

